IDISPLAY THERMOMETER

PRESS PLAY TO WATCH VIDEO

OUTFORM.

Creating Peace of Mind In Public Spaces

Outform's iDISPLAY Thermometer is designed to instill a sense of trust and safety in people across industries as they re-commence everyday activities, and public gatherings post COVID-19. As we continue to find innovative ways to do our part in flattening the curve, Outform's non-contact infrared Thermometers will enable our customers to invite users back in stores, schools, and work, in a costeffective, efficient, and safe way.

Backed by the world's leading technology in infrared thermopile arrays, iDISPLAY Thermometer uses Heimann, Melexis, or Omron Sensors to capture temperature in a touchless, frictionless, and accurate way. Within a matter of two seconds, iDISPLAY Thermometer is able to read body temperatures, and alert users, and designated associates if they have a fever.



C€ № Certified

TOUCHLESS

As people become increasingly conscious and hesitant to touch public surfaces, contactless interaction is among top priorities for people today. Triggered by facial recognition, users can have their temperature read by simply standing within three feet of iDISPLAY Thermometer.



WORLD LEADING THERMAL IMAGING TECHNOLOGY Backed by the world's leading technology in infrared thermopile arrays, iDISPLAY Thermometer can recognize and capture different levels of infrared light to accurately and rapidly detect temperature.

RAPID RESPONSE

A frictionless interaction, iDISPLAY Thermometer enables users to have their temperatures read in a matter of 2 seconds, ensuring a steady and safe flow of traffic into public spaces.



LABOR SAVINGS

By eliminating the need for dedicated personnel, iDISPLAY Thermometer is a cost efficient, and reliable alternative to dedicated staff.



BUILT-IN HAND SANITIZER DISPENSER

Designed to keep users safe, and create peace of mind in public spaces, iDISPLAY Thermometer has a built in hand sanitizer, and drip tray.



ONLINE AND ANALYTICS SUPPORT

- ANALYTICS / APK
- SECURITY CARD ACCESS
- ATTENDANCE RECORD
- OPTION FOR FACE RECOGNITION
 (FOR OFFICE WITH EXISTING STAFF MEMBERS)
- OPTIONAL NFC FOR SECURE ENTRANCE AREA.



KEY FEATURES



FEVER ALARM

When users have a temperature reading higher than 100.4° Fahrenheit or 37.8° Celcius, an alarm will sound to alert the user that they have a fever.



WORKS WITH PROTECTIVE MASKS

The Thermometer's facial recognition feature has been programed to capture temperature readings of users who are wearing protective masks, though will disable readings if the user's face is being obstructed to skew the temperature.



ACCESS LIMIT

ACCESS CONTROL

iDISPLAY Thermometer can be synced with automatic doors, or ticketing systems to restrict entry access to people who have a fever.



FACIAL DETECTION

OFFLINE AND ONLINE FACIAL DETECTION

The Thermometer's facial detection not only facilitates contactless temperature taking, but also allows for facial capturing. Used to relay data and images of users with a fever, this feature enables seamless management in high traffic locations (optional recognition)



FACE RECOGNITION

OPTION FOR FACIAL RECOGNITION

iDISPLAY Thermometer can be programmed to include facial recognition to capture and store valuable data.



WORLD LEADING THERMAL IMAGING TECHNOLOGY

Heimann, Melexis, or Omron Sensors can recognize and capture different levels of infrared light to accurately and rapidly detect temperatures of users within two feet of the Thermometer.



WIFI CONNECTIVITY

WIFI CONNECTIVITY

iDISPLAY Thermometer's WiFi capability facilitates data capture and management.



HEIGHT OPTIONS

HEIGHT OPTIONS

Floor-standing and countertop models fit the needs of specific locations and heights of visitors.




HAND SANITIZER

Designed to keep users safe, and create peace of mind in public spaces, iDISPLAY Thermometer has a built in hand sanitizer, and drip tray.

STAND OPTIONS & ACCESSORIES



PRODUCT SIZE

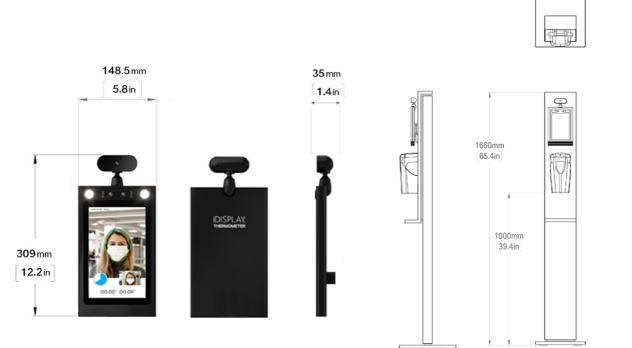




300mm

11.8in

350mm

13.8in



©2020 OUTFORM™ All RIGHTS RESERVED

TECHNICAL SPECIFICATIONS


SYSTEM	CPU	RK3288 quad-core Cortex-A18 @1.8G GPU Mail T764
OTOTEM	RAM	2GB
	Internal Memory	8GB
	Operation System	Android 5.1
DISPLAY	Panel Size	8"
	Resolution	800*1280
	Contrast Ratio	1000:1
	Brightness	25Ocd/M
	Aspect Ratio	16:10
NETWORK	WiFi	802.11b/g/n 2.4G
	Bluetooth	Bluetooth 4.1
INTERFACE	USB	OTG data
	RJ-45	100M/100M Ethernet
	Power	DC 12V
SOFTWARE	Temperature Accuracy	+/- 0.3° C or +/- 0.54° F
	Measurement Distance	0.3 - 0.8 Meters
	Dual Light Infrared Thermal	Heimann/ Melexis/ Omron Sensor
	Image Detection	
	Temperature Range Detection	28° C / 82.4 F to 43° C / 109.4 F
RELIABILITY	Overall Power Consumption	Below 18W
	Protection Level	IP54
	ESD	Positive and negative 4K contact discharge/8Kv air discharge

PACKAGING SPECIFICATIONS

ADULT STAND PACKING 388.5mm x 365mm x 1626.5mm- 11KG CHILD STAND PACKING 388.5mm x 365mm x 1130mm- 9KG COUNTER STAND PACKING 388.5mm x 365mm x 568mm- 5.5KG

PRODUCT INTERFACE

FRAME DESCRIPTION

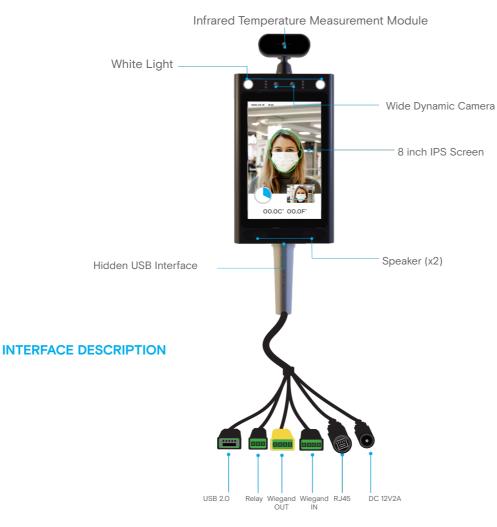

MULTI-SCENARIO APPLICATION

MALLS



MUNICIPAL BUILDINGS



SCHOOLS



GYMS



RETAIL



OFFICES

